



Model RLRB Radiant Broiler

Fine Cooking Equipment For Over 70 Years

Date: Project: Quantity:

*Performance
and quality
at the right
price!*



Floor Model

Welded #304 Stainless Steel

For easy cleaning and long life

Removable Fire Box

For easy cleaning and maintenance

Enclosed Back

Directs heat to product, not out the back

Extended Burners - 18" length

For better heat distribution





The Connerton Company

1131 E. Wakeham Avenue, Santa Ana, CA 92705-4145

Telephone: (714) 547-9218 Fax: (714) 547-1969

www.connertoncompany.com

Model RLRB Radiant Broilers

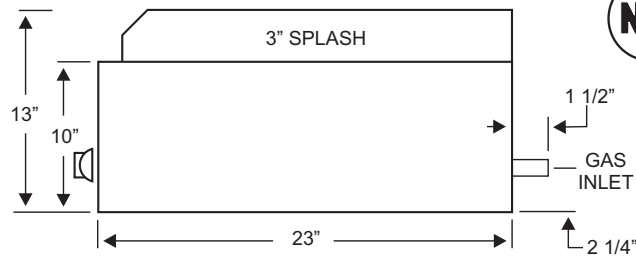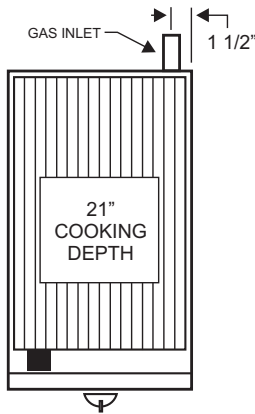

Model	Width	Depth	BTU	Burners	Wt. (Est)*	Floor Model Wt. (Est)*
RLRB-23-12R	12"	23"	28,000	1	65	85
RLRB-23-17R	17"	23"	28,000	1	80	100
RLRB-23-22R	22"	23"	56,000	2	110	130
RLRB-23-27R	27"	23"	56,000	2	125	145
RLRB-23-32R	32"	23"	84,000	3	155	180
RLRB-23-37R	37"	23"	84,000	3	175	200
RLRB-23-42R	42"	23"	112,000	4	195	225
RLRB-23-47R	47"	23"	112,000	4	215	245
RLRB-23-52R	52"	23"	140,000	5	245	280

*Note: Weight estimates are uncrated

Product Specifications:

Body:	18 Gauge #304 Stainless Steel, Fully Welded
Fire Box:	16 Gauge #304 Stainless Steel, Fully Welded
Front:	Removable 18 Gauge #304 Stainless Steel Panel
Top Grates:	Heavy Duty Cast Iron w/Adjustable Rear Height
Radiants:	12 Gauge Steel
Burners:	28,000 BTU Cast Iron, 18" Long
Drip Pan:	18 Gauge #304 Stainless Steel
Valves:	Heavy Duty Brass
Gas Inlet:	3/4 NPT
Legs (Floor Model):	1-1/2" sq. X 16 Gauge #304 Stainless Steel tubing welded to body, with Stainless Steel undershelf and adjustable feet

Available Options:

- 1/2" Steel Rolling Rod Grates
- Stainless Steel Plate Shelf
- 4" Legs (welded to body)

Notes:

Gas Pressure Regulator is supplied and must be installed
 Non-Combustible Locations Only: 0" Clearance sides and back
 Specify counter or floor model
 Specify type of gas and altitude if over 2,000 feet

Connerton Company reserves the right, without notice, to make changes and revisions in product specifications, materials and design, which in our opinion will provide better performance, durability and efficiency.

The Connerton Company

Telephone: (714) 547-9218

Fax: (714) 547-1969